

USB Display Adapter

Easy to Have One More Quality Display

This USB Display Adapter enables you to connect one more monitor, LCD or projector to a computer with a USB 2.0 port. For desktop users adding an extra monitor via USB connection is easier than ever without having to open the computer chassis to install an internal video card.

The most obvious benefit is that you get more desktop area to have more applications visible at one time. For example, you may work on one monitor while your family watch video on the other. No more stacking windows within the confines of a single display. Or you may span an application, e.g. spreadsheets, across two displays.

System performance is an important issue when using multiple monitors. Another benefit of this adapter is that it uses little computer resource, ensuring users get quality display without comprising computer performance.

Features

- Add-on monitor, LCD or projector through a single USB 2.0 port
- Supports up to 2 USB display adapters to work simultaneously
- Plug & Play
- Hot-plug; add or remove monitor without system reboot
- Windows Vista™ compatible
- Resumes from hibernation and suspend modes

Package Contents

- USB Display Adapter x1
- Driver CD x1
- USB Cable x1
- Quick Installation Guide x1
- DVI-A male to VGA female Adapter x1

Specifications

Model	AN2420			AN2440		
Video output	DVI-I 24pin + 5pin Female Connector			DVI-I 24pin + 5pin Female Connector		
Supported Resolutions	640x480, 1280x1024, 1366x768,	800x600, 1280x960, 1368x768,	1024x768, 1360x768, 1400x1050	640x480, 1280x1024, 1366x768, 1440x900,	800x600, 1280x960, 1368x768, 1600x1200,	1024x768, 1360x768, 1400x1050, 1680x1050,
Appearance	Metallic Dark Gray			Metallic Gray		
Host Interface	USB 2.0					
Host upstream link	USB Mini-B Type Female Connector					
Power	DC power jack					
Power Mode	Bus-powered					
Connectivity	Up to 2 adapters on a computer					
RAM	8M x 16 DDR Synchronous DRAM (SDRAM)					
Housing	Plastic					
Dimensions	84.3 (L) x 54 (W) x 17.8 (H) mm					
Operating System Support	Windows® 2000 SP4, XP SP2 and Vista 32-bit					
Supported Modes	Extended(Default), Mirrored, Primary Display					
Supported colors	16 Bits and 32 Bits					
Regulatory Compliances	FCC, CE					

* Specification is subject to change without further notice.




AN2420
(1280 x 1024)

AN2440
(1680 x 1050)

DVI to VGA Adapter

Application

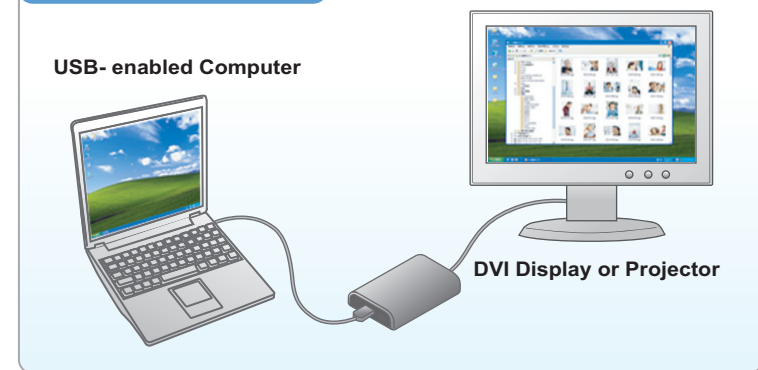

XEO Technologies

20 Rue de la Mairie, 67760 Gamsheim, France

TEL: +33 3 88 64 31 84

www.xeo.eu